

Hallmark At Risk Patient Products


SOFTDOOR



SOFTDOOR - Ensuite Door

Softdoor helps mitigate the most common risk in a service user bedroom setting, taking away one of the biggest unsupervised risks, the ensuite door.

- Minimal weapons & ligature risk
- Detaches upon a load of approx. 6-8kg
- Offers service user dignity whilst enabling staff observation
- Stitched & welded seams for additional infection control, strength & security
- Flexible, robust & easy to clean
- Fire Retardant - tested to the highest UK standard, Crib 7 BS5852

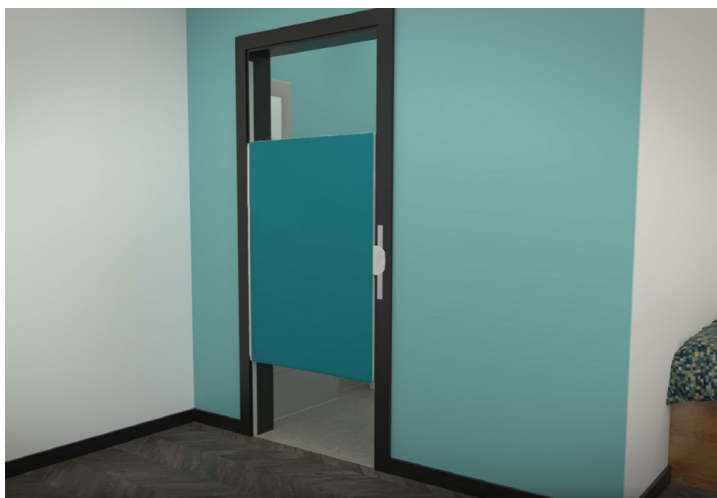


BENEFITS


- Minimal weapons risk, minimal ligature risk
- Safe & conventional
- Bespoke design
- Crib 7 Fire retardant
- Stitching concealed within welded seam
- Hygienic and easy to clean
- Low maintenance
- Openings: Left hand or right hand hinge available

SPECIFICATIONS

- The exterior vinyl is high performance dirt resistant and easy to clean.
- The strength of the fabric will hold up to daily service user use with a high degree of flexibility.
- The door is Fire retardant and is tested to BS5852 Crib 7 specification. The foam releases very little heat and very low levels of smoke and toxicity during combustion
- The vinyl exterior has a GREENGUARD certification and is certified as a low emission product suitable for indoor use. The ink has stretch and durability and is GREENGUARD Children’s and Schools certified. The inks contain no HAPs (hazardous air pollutants) or sensitizers, have no VOC’s , requires no special handling, is nontoxic, non-flammable and non-combustible. The synthetic polymers used in the inks are non-allergenic.
- The door detaches on upon a load of approximately 6-8kg
- Height: up to 1200mm
- Width: up to 1000mm
- It offers privacy and dignity for the service user, whilst enabling partial observations from staff.
- Product guaranteed for 2 years

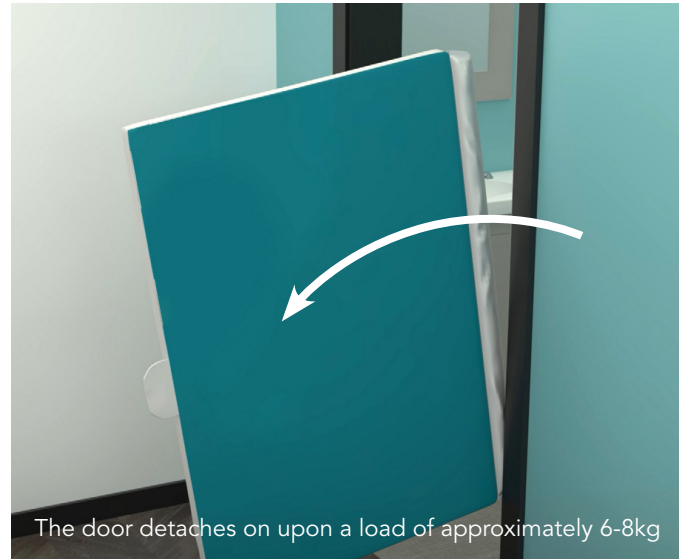

The door detaches on upon a load of approximately 6-8kg

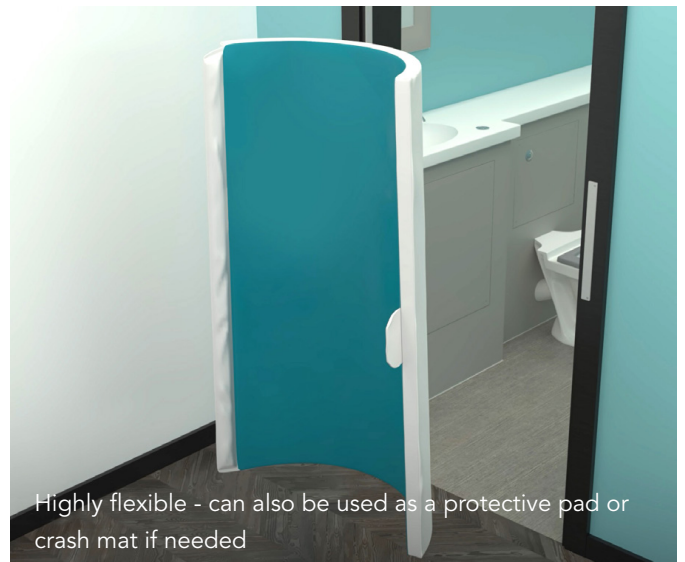

Highly flexible - can also be used as a protective pad or crash mat if needed

FEATURES

Construction: Seams are welded and stitched (using a tamper resistant stitch) for additional strength and security. The welded seams protects the foam internals from absorbing water and moisture.

Installation: Door hinges consist of magnets, which are welded and stitched creating a tamper resistant pocket. Hinges attach directly to a standard metal door frame or to separately provided discreet hinge plates.

Colours & Artwork: Backing colour: one colour available. Bespoke colour options available on request and price on application. A catalogue of images are available to chose from. Bespoke options are also available.